




NETRONOME

# Layer 3 Tunnel Support for Open vSwitch

Simon Horman

Would like to:

- Allow rx and tx of packets over tunnels whose payload packet does not have an Ethernet header
- Add these features to upstream OvS then offload them

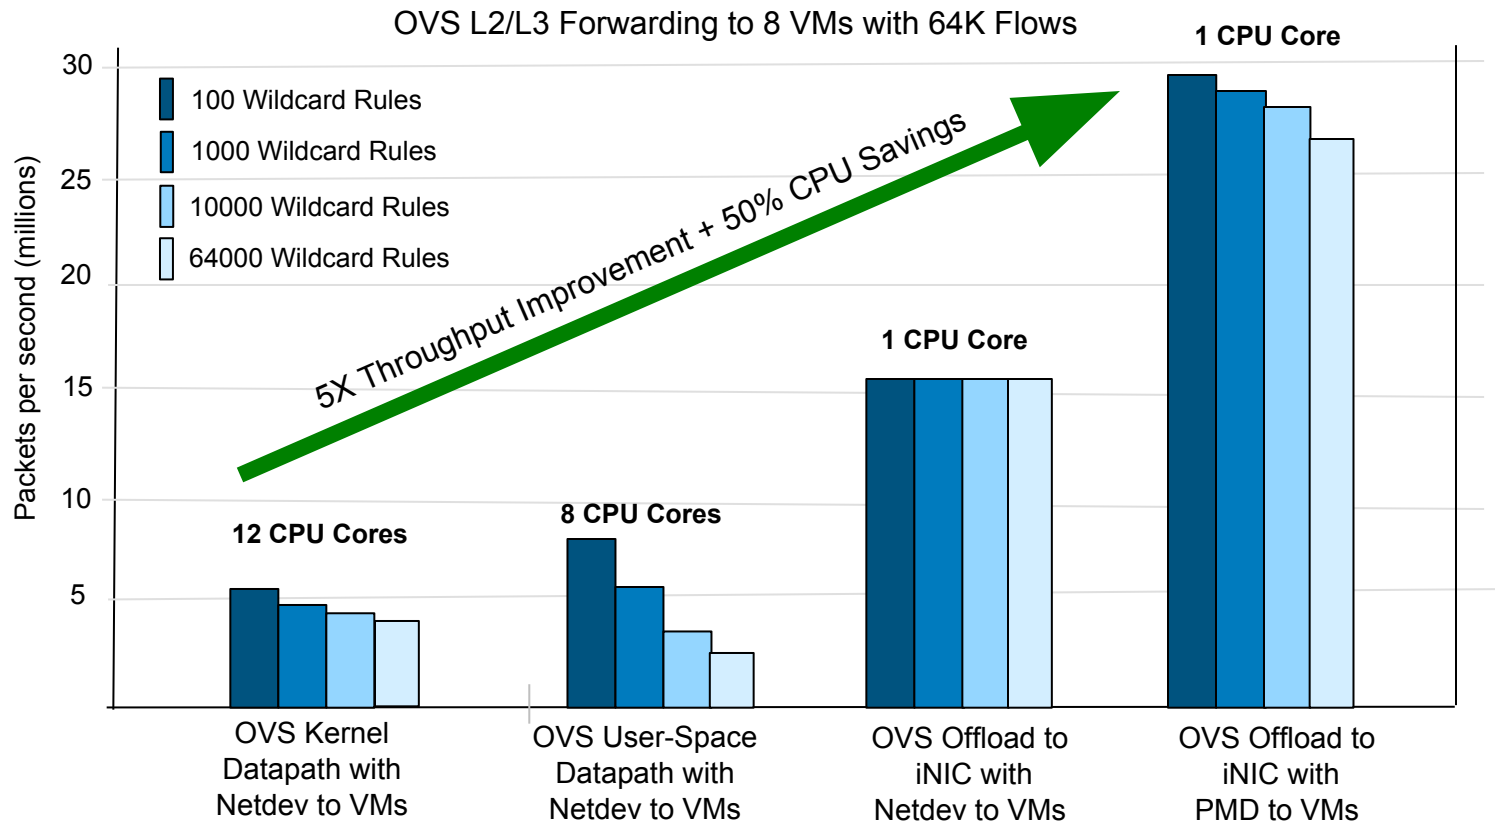

## Datapaths:

- Linux Kernel
- User-Space with and without DPDK

## Encapsulation Protocol:

- GRE (non-TEB) (rfc2794):
  - ▶ IP protocols over GRE
  - ▶ MPLS in GRE (rfc4023)

- Encapsulation and decapsulation is handled by output to and input from tunnel vports
- Not currently exposed in Open-Flow

## Kernel Datapath:

- On rx tunnel vport decapsulates packet passing the result and metadata to the datapath
- On tx tunnel vport encapsulates packet based on metadata

## Native Tunnelling:

- Tunnel ingress and egress on separate OvS bridge
- Internal rules match ingress and egress packets for tunnel vPorts and apply push and pop tunnel actions accordingly
- Like the Kernel Datapath tunnel metadata is:
  - ▶ Available in flow key after decapsulation
  - ▶ Used as parameters for encapsulation


- Layer 2 and 3 vPorts
- push\_eth and pop\_eth datapath actions
- Datapath Attributes and packet type



- Mode of vport
- Default is layer 2: behaviour of all vports until now


- Add or remove an ethernet header to/from start of packet
- Packets with a VLAN not currently permitted
- MPLS is treated as L2.5 and left alone
- Not currently exposed to OpenFlow:
  - ▶ Automatically included in actions of datapath flow

- Presence of ETHERTYPE and ETHER attribute indicates L2 packet
- Presence of ETHERTYPE but not ETHER attribute indicates L3 packet
- ETHERTYPE Used to communicate type of layer 3 packet
- Corresponds to Packet Type in GRE header

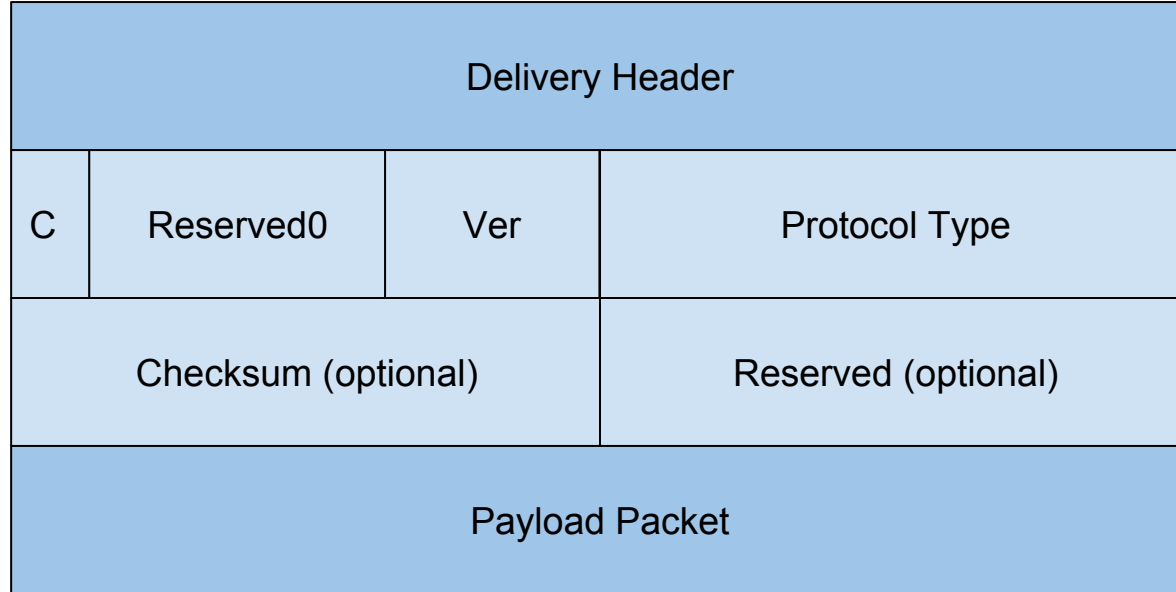

C: Checksum Present

- OvS User-Space (ovs-vswitchd) is aware of which vports are Layer 2 and which are Layer 3
- It is aware of the input port for each flow
- And can thus when translating from OpenFlow to datapath flows it can add push\_eth and pop\_eth actions as before output actions as necessary

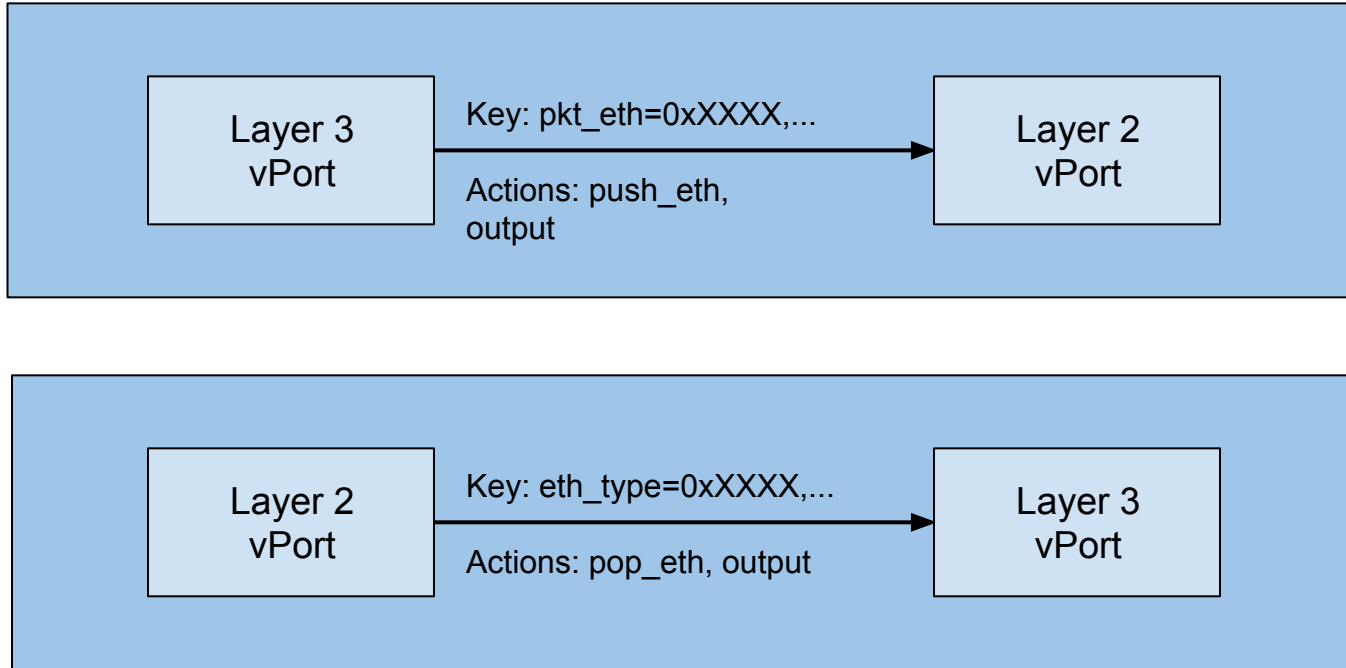

- User-Space (non-Datapath)
- Kernel Datapath
- User-Space Datapath

- vPorts have new layer3 flag to distinguish layer mode
- vPorts of the same type (e.g. GRE) but different layer mode share the same datapath vport



- Switch to using gretap rather than ipgre vport in kernel
- ipgre (and ipvxlan) vports have recently been enhanced to allow rx/tx of TEB as well as non-TEB packets
- Thus facilitating a single datapath vport for use with both Layer 2 and 3 user-space vports
- This design was motivated by a desire to avoid vport type explosion

- New user-space datapath only NEXT\_BASE\_LAYER flow key attribute
- Used to distinguish flows with layer 2 and 3 payload packets

```
ovs-vsctl add-port br0 tun1 -- \  
    set Interface tun1 type=gre \  
        options:remote_ip=10.0.0.2 \  
        options:key=flow \  
        options:layer3=true
```

## Encapsulation Protocols:

- MPLS in IP (rfc4023)
- MPLS in UDP (rfc7510)
- NSH (draft-ietf-sfc-nsh-05)
- VXLAN-GPE (draft-ietf-nvo3-vxlan-gpe-02)
- LISP (rfc6830)

Many, including:

- Lorand Jakub, Thomas Morin: Original implementation
- Jiri Benc: Kernel Tunnel Enhancements

Open vSwitch (User-Space):

<https://github.com/horms/openvswitch> me/l3-vpn

Kernel (Datapath):

<https://github.com/horms/linux> me/l3-vpn

Working towards upstream merge!

